



OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 31 TOWNSHIP 17 RANGE 5  
DATE: 5-2-02 9-29-05  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison re-set  
METHOD OF ESTABLISHMENT: County: 7-9-97

IN. S.P.C. E ZONE NAD '83

NAME: 17053101

N: 514659.9670(m)

E: 70293.9720(m)

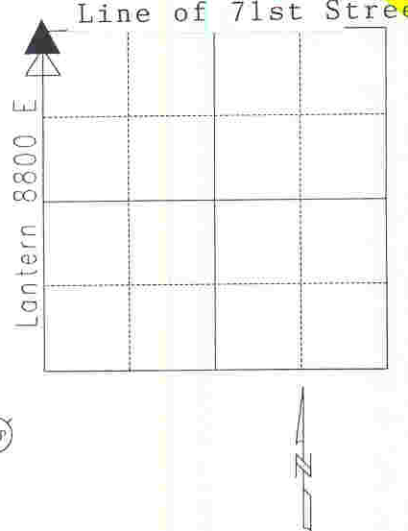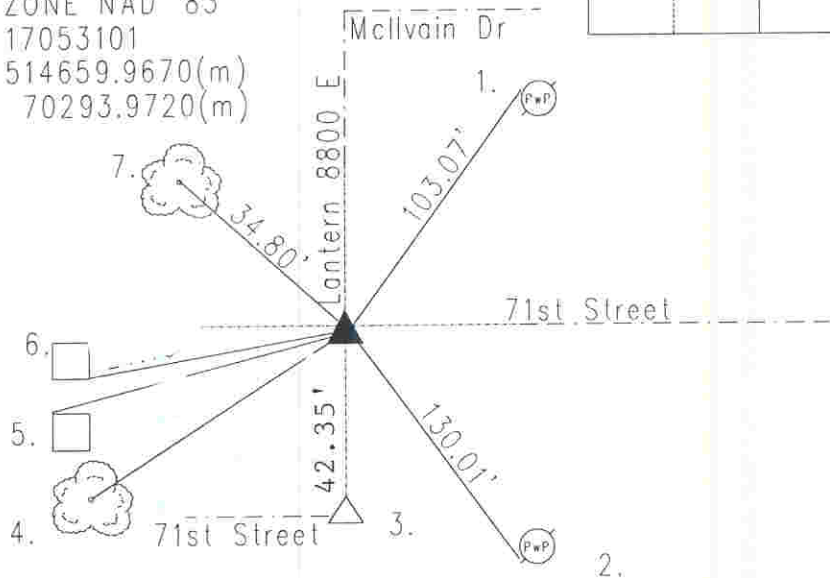

Original post set 1821 by Laughlin with witnesses; 12" beech S 2 E 31 links; 6" ironwood N 2 E 18 links, Corner fell 63 links N of NE 36-17-4. Legal Survey 7-1866 by Smith per Lawrence Township Legal Survey Book pg. 12. called corner 'F' stone, Witness stone 63 links S which would be the NE 36-17-4. Legal 11-1880 Fatout per Lawrence Twp. Legal Survey Book pg. 38 called corner 'I' and called again for stone with witness 63 links S of NE 36-17-4. 5-12-76 Wilcoxen called railroad spike (set or fd) in agreement with the Lantern Hills plat. Falling 41.78' (63 links) S to NE 36-17-4 given. 9-20-79 Bruer called the same. Schneider survey of Ft. Benjamin Harrison completed 11-16-81 called railroad w/'x'. Falling 41.77' S to NE 36-17-4 (railroad spike). Excavated 8-10 by Green. 2'x2' hole dug 30" dn. Railroad spike at surface was directly over a 2 railroad spike fd 6" dn. Probing revealed no stone. Harrison set. Re-tied 7-9- Re-tied 5-2-02 by Wilcoxen.

17053101

REF.	DISTANCE	DESCRIPTION
1.	103.07'	Road nail W PwP#14-281 5 1/2' up
2.	130.01'	<del>Road nail W PwP#160 281 B 36" up</del>
3.	42.35'	Due S to NE 36-17-4 (Harrison)
4.	55.23'	Mag nail w/washer N 20" oak 10" up fd
5.	41.95'	NW corner of brick column address 7118-7110
6.	21.25'	SE corner of brick column ADDRESS 7130
7.	34.80'	Mag nail w/washer E 15" maple 6" up